



# CRH-A10DAUX

Acil Stop

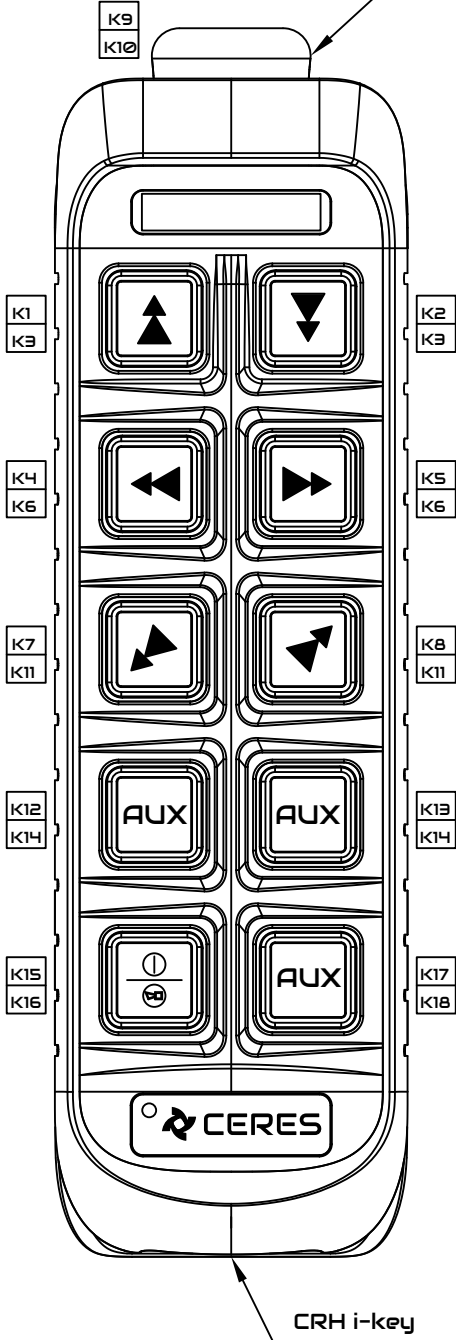

24~280V AC/DC



L1 — 15 (Faz) (Phase)  
N — 16 (Nötr)

K1 — 1 Kaldırma (Up)  
K2 — 2 İndirme (Down)  
K3 — 3 Kanca 2. Hız (Hook 2.Speed)  
10 Kanca COM (Hook)

K4 — 4 Kedi Sol (Troyler Left)  
K5 — 5 Kedi Sağ (Troyler Right)  
K6 — 6 Kedi 2. Hız (Troyler 2. Speed)  
11 Kedi COM (Troyler)

K7 — 7 Köprü İleri (Bridge Forward)  
K8 — 8 Köprü Geri (Bridge Backward)  
K11 — 9 Köprü 2. Hız (Bridge 2. Speed)  
12 Köprü COM (Bridge)

K12 — 17 AUX 1  
K13 — 18 AUX 2  
K14 — 19 AUX 1-2 (AUX 2.Speed)  
20 AUX Com

K15 — 21 AUX 3  
K16 — 22 AUX 3-2 (AUX 2.Speed)  
K17 — 23 AUX 4  
K18 — 24 AUX 4-2 (AUX 2.Speed)  
25 AUX Com

K9 — 13 Ana Kontaktör(Giriş)  
(Main In Contactor)  
K10 — 14 Ana Kontaktör(Çıkış)  
(Main Out Contactor)

## Açıklamalar

1. Tüm butonlar için aktif/deaktif özelliği
2. Acil stop: Kırmızı buton
3. Start şekli: Bir kısa + Bir uzun şekilde çift start
4. Besleme: 4.5V/DC 3 adet AA pil
5. CRH i-key
6. Role kapasitesi 10A @ 250VAC
7. SIL II ye uygun iki adet güvenlik rölesi(K9,K10)

Seri No

Tarih

Proje İsmi

İkitelli OSB Giyim Sanatkarları Sanayi Sitesi 2.Ada B Blok No:317/2  
Başakşehir/İstanbul

  
**CERESTECH**

T: +90 212 407 0289

Mail: destek@cerestech.com.tr

Web: www.cerestech.com.tr