



INSULATED CONDUCTOR SYSTEMS CMBH (H24/H32)

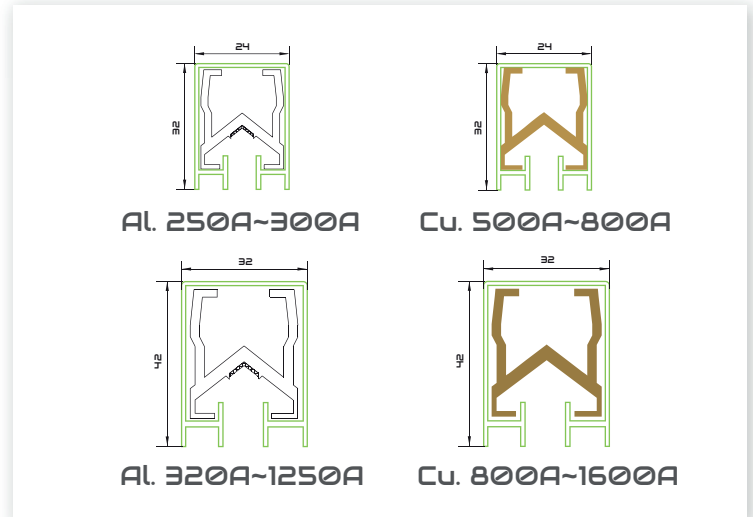

Standard Length:6.0 m,other lengths on request
Support spacing:1.5m ~2.0 m.

Current Collector

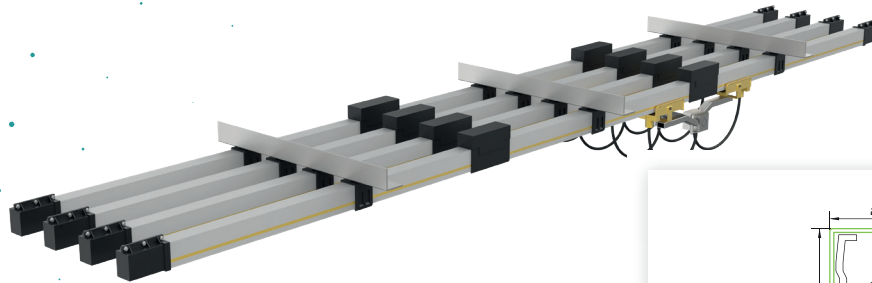

CMB200(H24)
CMB400(H32)



CMBL-200 (H24)
CMBL-400 (H32)



CMBT-500 (H32)

Jointing Box



CJBH24-1
CJBH32-1

Hanger Clamp



CHC24-1
CHC32-1
CHC24-2
CHC32-2

Joint



CJH24(Al:250A~300A)
CJH32(Al:320A~1250A)
CJH24JT(Cu:500A~800A)
CJH32JT(Cu:800A~1600A)

End Cap



CEC24
CEC32

Isolating Section



CISH24
CISH32

Expansion Joint



CEJH24-Al(Al:250A~300A)
CEJH32-Al(Al:320A~1250A)
CEJH24-Cu(Cu:500A~800A)
CEJG32-Cu(Cu:800A~1600A)

Carbon Brush



CCB24-130(CMB200,CMBL200 için)
CCB32-147(CMB400,CMBL400 için)
CCB32-180(CMBT500 için)

Tow Arm



MBTA133 (CMBL200 için)
MBTA134 (CMB200,CMD400,CMBL400,CMBT500 için)